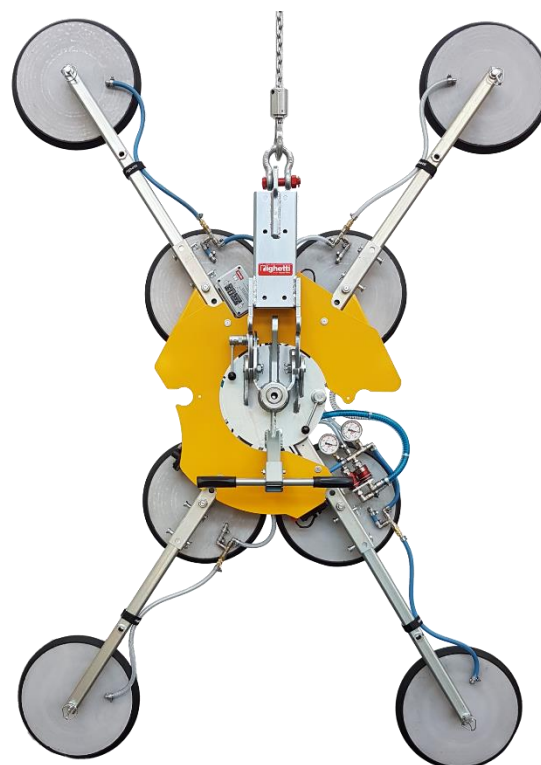
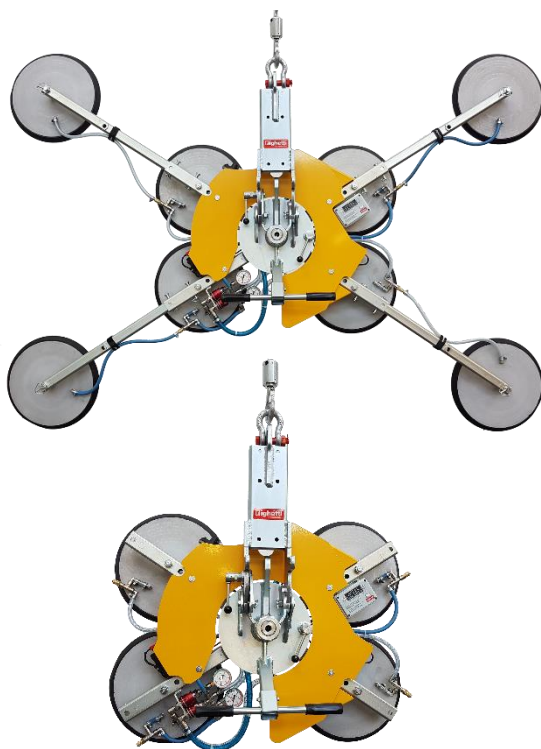


Model

smart vacuum lifters

VB4+4 RCMBM d4

 Kg max
1200

 Power supply
Batteries


The VB4+4 RCMBM d4 is one of our best seller vacuum lifters. On VB4+4 model, the **four external suction pads are on removable extension arms** that permit to increase the lifting capacity and the pad spread. The pad arms can be removed quickly and easily.

In configuration with 4 pads, the lifting capacity is 600 kg and it is possible to lift small glass panels. With the addition of four extension pad arms, the **lifting capacity increases to 1200 kg**. Thanks to its extension arms, this lifter can also reach **different configurations**.

Vacuum glass lifter VB4+4 RCMBM d4 **is powered by rechargeable batteries** that, if necessary, may be easily removed and quickly replaced. The VB4 RCMBM vacuum lifter features **manual tilt and manual 360 degree rotation**. Its compact and flat design permit that VB4 could work also behind scaffoldings.

VB4+4 is specific vacuum glass lifter for construction site use with **dual vacuum circuit** according to EN13155.

The same model is available with vacuum pads d. 310 mm and 400/800 kg capacity (mod. VB4+4 RCMBM) and also with powered tilt and rotation (mod. VB4+4 RCEBE).



Manual tilt 0-90°



Manual continuous rotation 360°



Max capacity 1200kg



4+4 vacuum pads d.390 mm



Safety devices




Modular frame

CE

made in
ITALY

Vacuum glass lifter

Technical drawing

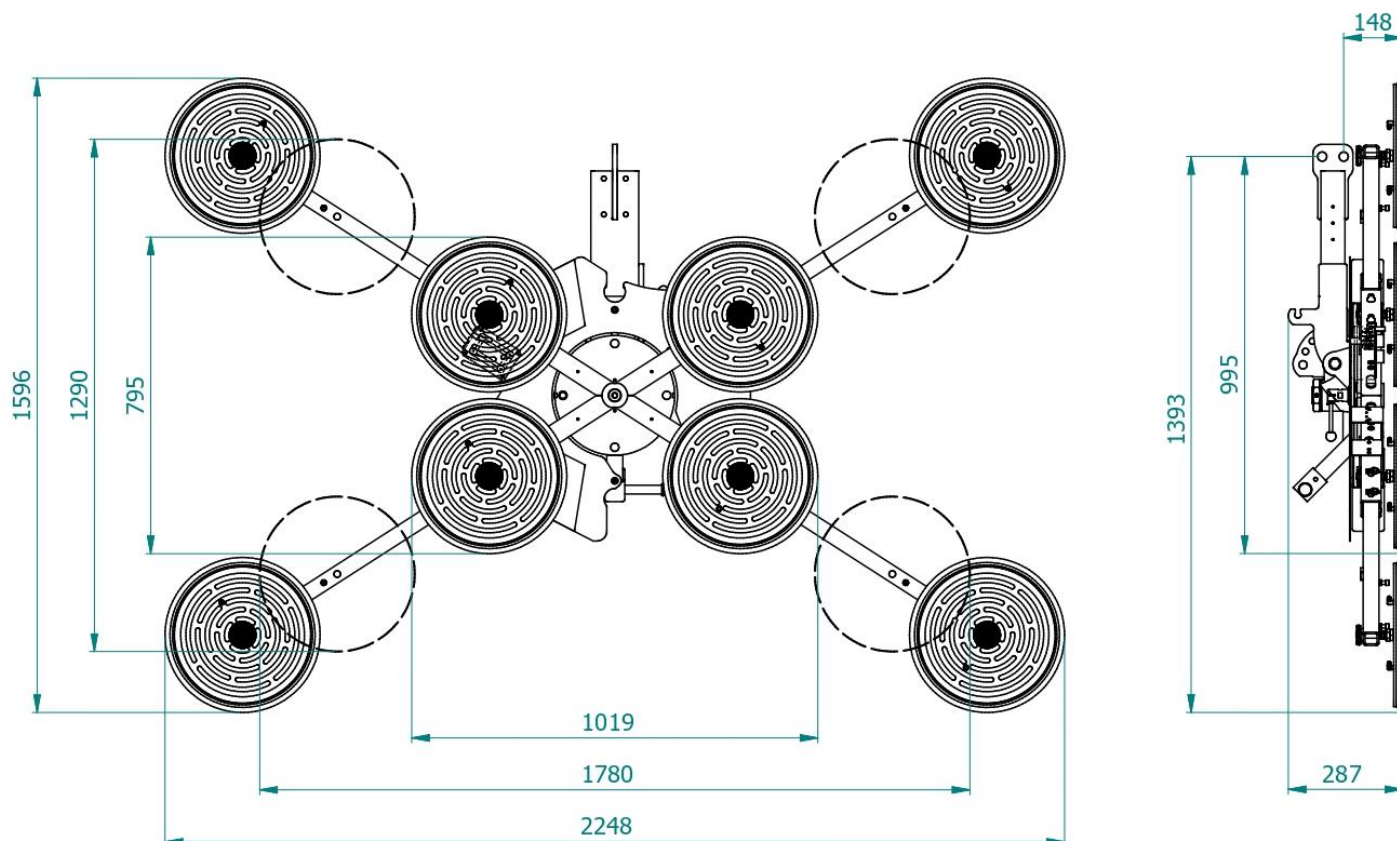

Technical specification

Application	Glass panels
Lifting capacity	Max 1200 kg
Suction pads	No. 4 + 4 round suction pads diameter 390 mm Lipped pads with safety ring
Pad spread	Pads are movable in different configurations 4 pads mm 1019 x 795 8pads mm 2248 x 1596
Load movement	Continuous 360 degree rotation, with possibility of automatic locking at each 90° 90 degree tilt, with possibility of automatic locking in upright and flat position
Operating system	DC vacuum pump powered from on-board batteries High capacity re-chargeable batteries Battery status indicator Economizer for reduction of the energy consumption
Vacuum system	2 independent vacuum circuits, each vacuum circuit with vacuum reserve and non return valve
Weight of lifter	103 kg
Structural depth	mm 287
Control	Manual on off valve on the lifter's frame Release of the load by dual action security command Remote control as optional
Standard features	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit. Vacuum filters Battery charger 240 Volt Multi position hook connection Lowered suspension for installing of transom window