## Vacuum glass lifter



# VEB4 RCMBM

The VEB4 RCMBM model is vacuum glass lifter with four suction pads d. 310 mm, perfect to lift and handle glass sheets.

VEB4 has **electric operating system**. As standard is available 400V 3 phase or 220V single phase operated system. On request other voltage.


The lifter permits to **rotate the glass of 360° and tilt 90°** from horizontal to vertical and vice versa.


The 4 suction pads are repositionable in **two different positions**: when the lifter is closed the pads spread is 863x666 mm; when the lifter is open the pads spread is 1166x861 mm.

VEB4 is manufactured with a **single vacuum circuit**; dual vacuum circuit is available on request as optional.

The lifter is also available with suction pads d.390 mm and capacity 600 kg, mod VEB4 RCMBM d4.



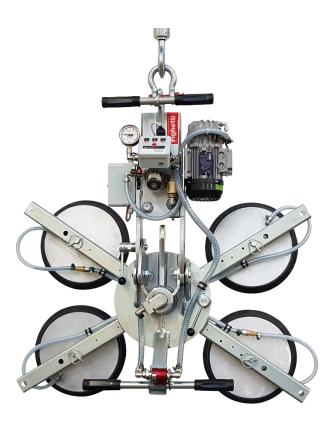

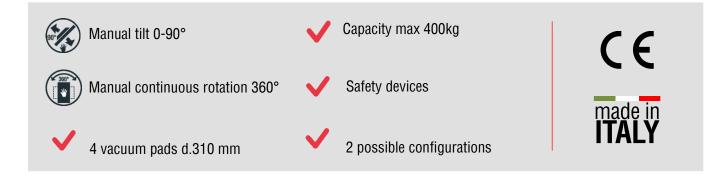



## Vacuum glass lifter



**Technical drawing** 

### CONFIG. A

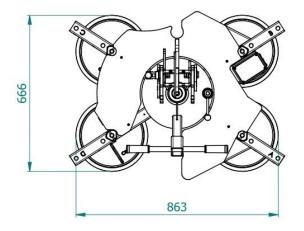

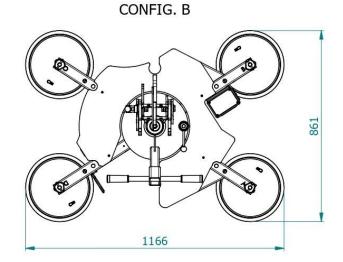

#### **Technical specification**

Application	Glass panels
Lifting capacity	Max 400 kg
Suction pads	No. 4 round suction pads diameter 310 mm
	Lipped pads with safety ring
Pad spread	Repositionable pads in two positions:
	mm 863 x 666 / 1166 x 861
Load movement	Continuous 360 degree rotation, with possibility of automatic locking at each 90°
	90 degree tilt, with possibility of automatic locking in upright and flat position
Operating system	Electric operated
	400V 3 phase 50Hz OR 220V single fase 50Hz
Vacuum system	Single vacuum circuit
	As optional dual vacuum circuit
Weight of lifter	Kg 60
Control	Manual on off valve on the lifter's frame
	Release of the load by dual action security command
Standard features	Audible and visual low vacuum warning devices
	Vacuum gauge
	Battery charger for alarm system
	Vacuum filter
	Multi position hook connection
	Lowered suspension for installing of transom window