


Vacuum glass lifter

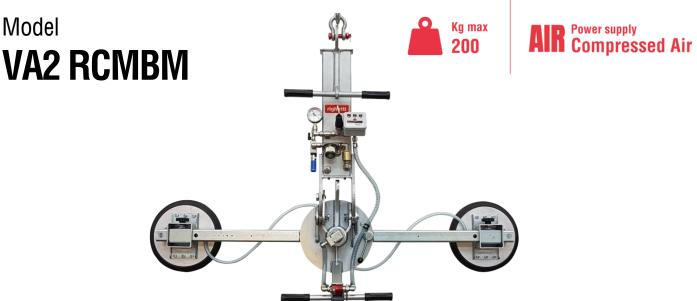

The model VA2 RCMBM is a **vacuum glass lifter specific for indoor use**, with two suction pads d. 310 mm, compressed air powered with lifting capacity up to 200Kg. The pads are replaceable along the arms in different positions.

The lifter features **manual 360° rotation and manual 0 – 90° tilt**. It is equipped with an audio-visual alarm unit that warns the operator of possible dangerous situations. The vacuum gauge with coloured scale allows constant control of the vacuum level reached. It features a **filtering system** for dust and condensation. The central beam is long mm 1500 as standard, on request we can build it in different lengths.

This model is also available with suction pads d. 390 mm and lifting capacity 300kg (VA2 RCMBM d4).

Application **Glass** panels Manual tilt 0-90° Lifting capacity Max 200 kg Suction pads No. 2 round suction pads diameter 310 mm Lipped pads with safety ring Various pads configurations Pad spread Manual rotation 360° Max mm 1660x310 Min 810x310 Load movement 360° manual rotation 90° manual tilt Indoor use **Operating system** Compressed air Vacuum system Single vacuum circuit with vacuum reserve and non-return valve Safety devices Weight of lifter Kg 57 Control Manual on-off valve on the lifter's frame Release of the load by dual action security command Standard features Audible and visual low vacuum warning devices Vacuum gauge, Vacuum filter, Adjustable pads position

Technical specification